
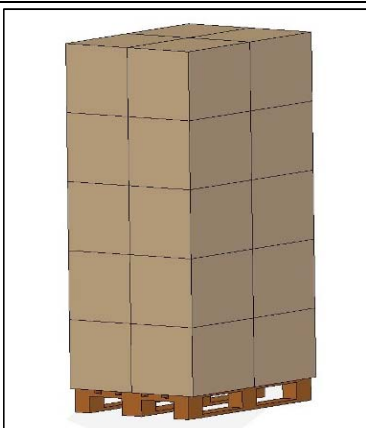




ECOS MOULD E230-23/CBNN

G9F08242

## Technical data

Product family:	Ecos	
Bottom A:	218 mm. +/- 1 mm.	
Top B:	231 mm. +/- 1 mm.	
Rim C:	243 mm. +/- 1 mm.	
Rim D:	249 mm. +/- 1 mm.	
Height H:	23 mm. +/- 1 mm.	
Weight:	15 gr. +/- 5%	
Material:	Bleached pure cellulose light cardboard, inner side laminated with polyester film of 7 my, through monocomponent adhesive, printed both outside and inside.	
Tot. Gr/sqm:	217 gr. +/- 5%	
Printing:	Full surface printing (both sides)	
Ink:	Black resistant to alcohol (rubbing) and to heat (200°) Our inks and promoter are in conformity with the requirements stated by EUPIA	
Adhesive:	Monocomponent adhesive used for laminating paper or cardboard.	
Additive:	Water based varnish resistant to heat and humidity.	
Heat resistance:	180° ÷ 220°	
Health Legislation:	Please refer to "Conformity declaration concerning paper and cardboard material to be in direct contact with foodstuffs".	
Packaging data:		
Box	mm. 665*260*265	
Volume	m3 0,046	
Quantity per box	200 pcs. (200 pcs. * 1 row)	
Pallet	EUR-PAL 80*120	
Lay-out	5 boxes per 7 levels tot. 35	
Quantity per pallet	7.000 pcs.	
Label	with data for product identification	
Protective film	Low density polyethylene used for packaging	
		

Prepared	Approved	Date	Rev.	Modifications executed:
		01/03/2009	2	
QUALITY MANAGER				
Ing. MEREGALLI				

## Customer's approval

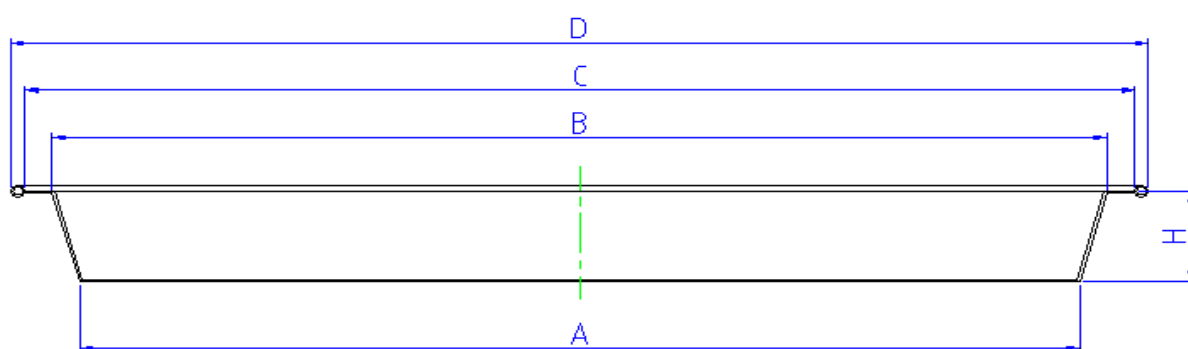
Stamp and signature:



Date:

PLEASE SEE OVERLEAF FOR TECHNICAL DRAWING

ECOS MOULD E230-23/CBNN

G9F08242



Prepared	Approved	Date	Modification executed
		02/08/2010	
QUALITY MANAGER			
Ing. MEREGALLI			

## Customer's approval

Stamp and signature:

Date: